

Manual of Free Standing Network Cabinet

Premium Muti-Use Cabinet for Data Center


HONE cabinet is the ideal solution for secure high-density server and networking applications in IT environments, which is packed with features designed to simplify rack equipment installations and rack equipment maintenance: top-panel cable routing ports, perforated doors to promote efficient airflow, adjustable mounting rails and more

Compliant

ANSI/EIA RS-310-D, IEC297-2, DIN 41491;

PART1, DIN41494; PART 7, GB/T3047.2-92, ETSI Standard

Key Features

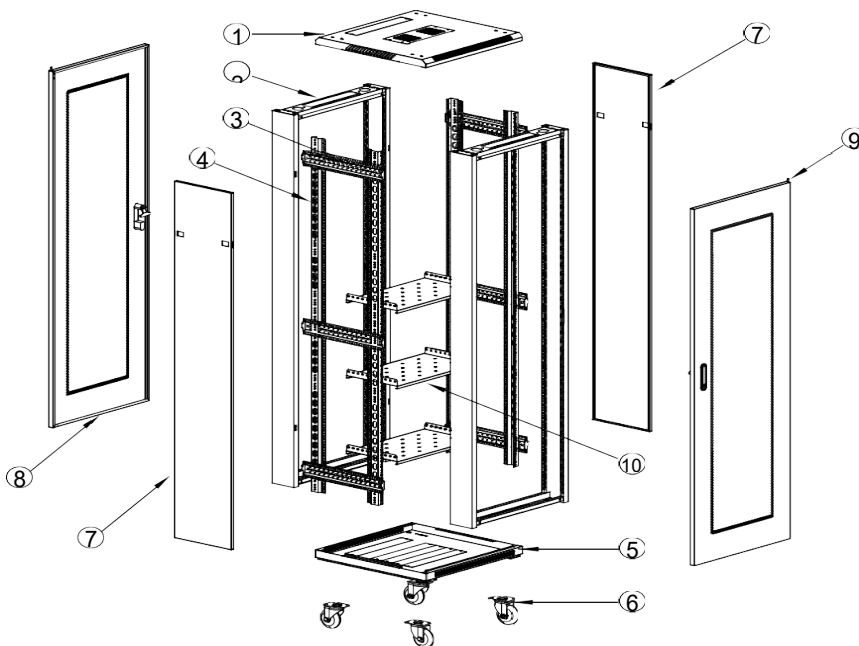

1	Top Panel	x1	A	M4 Cross Recessed Pan Head Tapping Screws	x14
2	Frame	x2			
3	Mount Angle	x6	B	M5 Cross Recessed Pan Head Tapping Screws	x54
4	Mounting Profile	x4			
5	Bottom Panel	x1	C	Hex Socket Cap Bolt & Nut	x16
6	Caster	x4	D	L Shape Stop Block	x4
7	Side Panel	x2	E	Side Panel Latches	x4
8	Perforated Rear Door	x1	F	Front Door Lock Kit	x1
9	Tempered Glass Front Door	x1	G	Rear Door Lock Kit	x1
10	Shelf	x3	H	Cage Nuts	x12
11	Fan	x1	I	Levling Feet	x4

Details Photos:



Technical Specification

Product Type	Multi-Use Cabinet
Number of Rack Spaces	42U
Size	2000mm*800mm*1000mm
Sheet thickness	Vertical beam (square hole strip): $\geq 2.0\text{mm}$, beam: $\geq 1.5\text{mm}$, main body: 1.0mm
Ingress protection	$\geq \text{IP20}$
Color	Black

CHENGDU HONELINKS INNOVATION TECHNOLOGY CO.,LTD.

501 Kechuang Road, Jinjiang District, Chengdu City, Sichuan Province

TEL: 86-028-86661062 Whatsapp/Cell:86-15196637014

Front Door	Perforated
Rear Door	Split Perforated
Static Load on Leveling Feet	1763lbs (800kg)
Spinner wheels	4pcs
19" EIA Square Mounting Holes	√
Adjustable Mounting Depth	√
Grounding Wire	Front and back door frames, top panel and side panels
Door ventilation rate:	≥75%

Products Size:



CHENGDU HONELINKS INNOVATION TECHNOLOGY CO.,LTD.

501 Kechuang Road, Jinjiang District, Chengdu City, Sichuan Province

TEL: 86-028-86661062 Whatsapp/Cell:86-15196637014

Package

Type(W*H*D)	Main body pack size(mm)	Bottom cap size(mm)	Weight
18U(600*1000*600mm)	620*620*140	620*1000*260	38.9kg
22U(600*1200*600mm)	620*620*140	620*1200*260	44.7kg
22U(600*1200*800mm)	620*820*140	620*1200*260	53.8kg
32U(600*1600*600mm)	620*620*140	620*1600*260	57.1kg
32U(600*1600*800mm)	620*820*140	620*1600*260	68kg
37U(600*1800*600mm)	620*620*140	620*1800*260	63.1kg
37U(600*1800*800mm)	620*820*140	620*1800*260	75.8kg

Type(W*H*D)	Main body pack size(mm)	Bottom cap size(mm)	Side panel Size(mm)	Weight
42U (600*2000*1000mm)	620*1020*140	620*2000*260	720*1900*50	94.1kg
42U (800*2000*1000mm)	820*2000*260	820*1020*140	720*1900*50	107kg